


**Flanged 3 Piece Floating Full Bore Ball Valves-WOG1000**  
**Flanged 3 Piece Floating Reduced Bore Ball Valves-WOG1000**

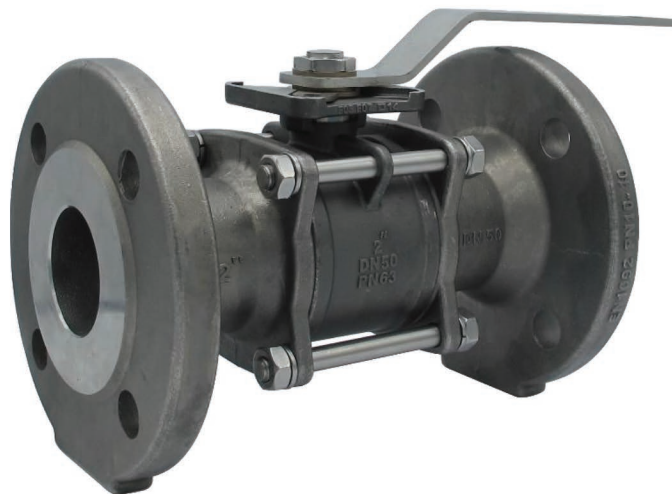


**DN 15-50 PN 10-40 / WOG1000**

- Flange drilling according to: ISO7005-2, DIN EN1092-2
- Final inspection and test according to: ISO 5208, DIN EN 12266, API 598
- Coating: Epoxy Powder Paint with Electrostatic Process-RAL 5005
- Direct Mount Actuator according to ISO5211
- Available Material:
  - Body: CF8M, CF8, ASTM A216WCB
  - Ball: AISI420, AISI304, AISI316, CF8M, CF8, Duplex
  - Shaft: AISI420, AISI304, AISI316, Duplex
  - Sealing: PTFE, RPTFE, NBR, EPDM, Silicon, Viton
  - Seat: AISI420, AISI304, AISI316, CF8M, CF8, Duplex

\*\*Valves with special material are manufactured according to customer requirement.

## Flanged 3 Piece Floating Full & Reduced Bore Ball Valves DN 15-50 PN 10-40 / WOG1000

PN	Hydrostatic test pressure in bar with water		
	shell	high pressure closure	low pressure closure
10	15	11	4 to 7
16	24	18	4 to 7
25	38	28	4 to 7
40	60	44	4 to 7

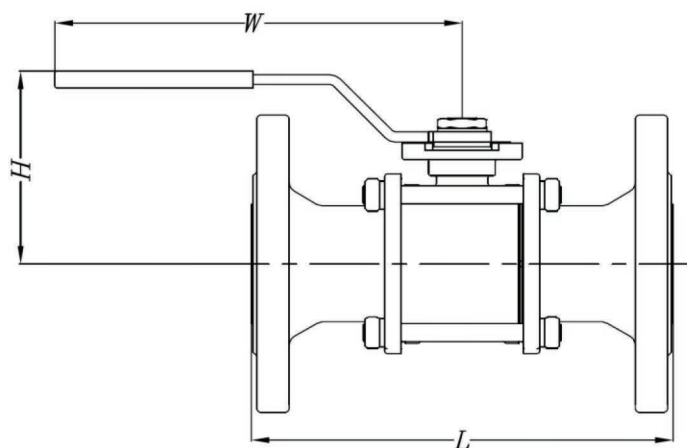

DN	L [mm]	H [mm]	W [mm]	Weight [kg]
15	130	62	112	2.1
20	150	69	140	3.1
25	160	71	140	3.9
32	180	87	175	5.9
40	200	93	220	7.5
50	230	107	220	11